



PRODUCT INFORMATION SUMMARY

TORNEIRAS ONLINE

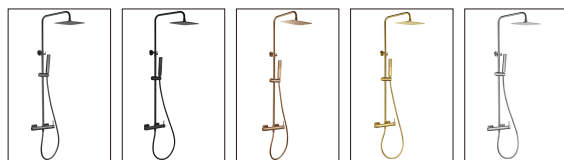

Ref.	EAN	Finish
BDT064	8435668065221	Chrome
BDT064/BGM	8435668065245	Black gun metal
BDT064/NG	8435668065238	Matte black
BDT064/ORC	8435668065269	Brushed rose gold
BDT064/OC	8435668065252	Brushed gold
BDT064/NQ	8435668065276	Brushed nickel

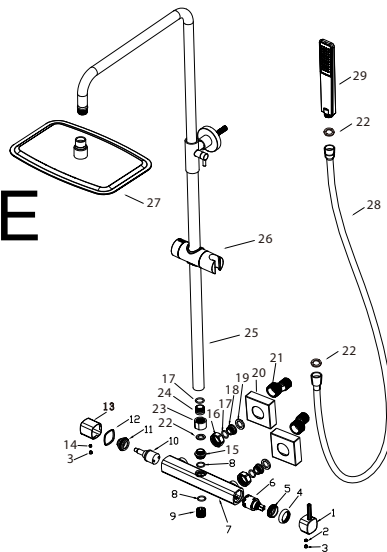


CODE	NAME	MATERIAL	REF	CODE	NAME	MATERIAL	REF
1	Handle	Zinc		16	Nut	Brass	
2	Screw	SUS304/4x4mm		17	O-ring	NBR	
3	Button	ABS		18	Valve	SUS 304	
4	Decorative cup	Brass		19	Rubber washer	NBR	
5	Nut	Brass		20	Cover	SUS 304	
6	Cartridge	28mm		21	Cabrio leg	SUS 304	
7	Body	Brass		22	Rubber washer	NBR	
8	O-ring	NBR		23	Nut	Brass	
9	Connect	Brass		24	Connect	Brass	
10	Cartridge	25mm up	CRT068*	25	Pipe	SUS 304	
11	Nut	Brass		26	Slider	ABS	
12	Washer	POM		27	Shower head	SUS 304	RDR001*
13	Handle	Zinc		28	Hose	PVC	FLX002*
14	Screw	SUS304		29	Shower hand	ABS	MDH013*
15	Connect	Brass					

* CONSULTAR PARA ACABADOS DE COLOR


Installing instruction




Step 1. Connect curved leg with the inlet pipe inside the wall




Step 2. Connect decorative cover to curved leg




Step 3. Install shower faucet properly and connect to curved leg on the wall



Step 4. Install shower pipe according to the distance of fix part






Step 5. Install shower hand and shower head to the set




Step 6. Test function of shower set, clean the set

Usage function instruction



FLOW RATE	
Detalles	
FLOW RATE REF	BDT064
hand shower mixer water 0.1Mpa(L/MIN)	6.1
hand shower mixer water 0.3Mpa(L/MIN)	10.7
hand shower mixer water 0.5Mpa(L/MIN)	13.9
hand shower singer cold water 0.1Mpa(L/MIN)	5.8
hand shower singer cold water 0.3Mpa(L/MIN)	10
hand shower singer cold water 0.5Mpa(L/MIN)	13
shower head mixer water 0.1Mpa(L/MIN)	8.5
shower head mixer water 0.3Mpa(L/MIN)	15
shower head mixer water 0.5Mpa(L/MIN)	19.5
shower head singer cold water 0.1Mpa(L/MIN)	7.5
shower head singer cold water 0.3Mpa(L/MIN)	13.4
shower head singer cold water 0.5Mpa(L/MIN)	17.3

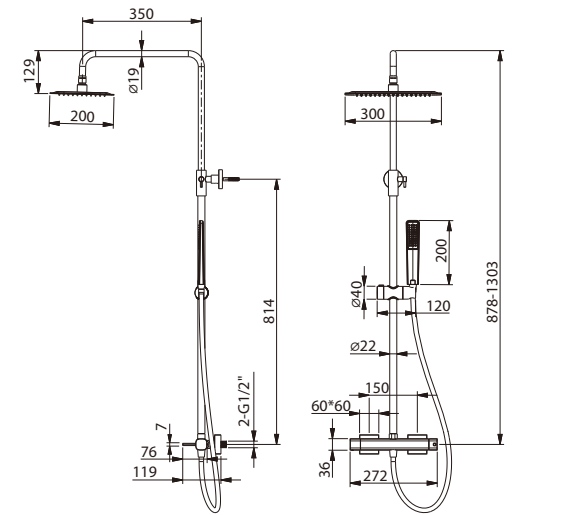

Product sizes (cm)	42.5*13.3*90
Weight (kg)	5.5
Guarantee	5 years
Max Preasure (bar)	5
Min Preasure (bar)	0.5
Optimum preasure (bar)	1-4 (Recommended 3)
Max. temperature	85°C
Min temperature	65°C

CERTIFIES

That all our products, provided that they are used in normal conditions or installed in accordance with current standards, are guaranteed against any manufacturing defect for a period of five years, except for products purchased before January 1, 2020, which will have the mand atory coverage of 2 years from the date of invoice.

Requirements and exclusions

Failure to comply with the instructions for assembly, use and maintenance of our products on the packaging and in our catalogue and published on our website: www.imexproducts.es, releases IMEX PRODUCTS, S.L. from any liability.

In any case, the acceptance of the defect by our technical department is necessary. In addition, transport costs will be charged only in the event that on IMEX PRODUCTS, S.L. technician determines the proper functioning of our products.

IMEX PRODUCTS, S.L. will decide to repair the product or replace it. It will be necessary to present the purchase invoice.

Assemnly, maintenance or repairs carried out by non-specoalists re excluded from the warranty.

Wearing parts such as hoses, handles, seals, filters, aerators, etc. are not covered by the warranty.

